


CIEPŁO Z NATURY

PODSTAWOWE INFORMACJE O PRODUKCIE

- Kratka typu luft montowana w obudowie kominka.
- Wykonane ze stali 1,5mm.
- Dostępne w kolorze czarnym z wykończeniem ze stali nierdzewnej szlifowanej.
- Funkcja nawiewna przy montażu pod wkładem (otwory wentylacyjne skierowane ku górze).
- Funkcja wywiewna przy umieszczeniu nad kominkiem (otwory wentylacyjne skierowane ku dołowi).

KRATKA WENTYLACYJNA **SLIM INOX 12**

Kod produktu	Wymiary zewnętrzne			Wymiary otworów montażowych			Pole czynne kratki	Kod produktu	Wymiary zewnętrzne				Wymiary otworów montażowych			Pole czynne kratki
	A	B	C	D	E	A			B1	B2	C	D1	D2	E		
SL-12x20-SI	120	200	134	175	95	153	153	SL-12x56x56	120	560	560	97	546	546	95	981
SL-12x40-SI	120	400	134	375	95	333	333	SL-12x60x40L L - in / R - out	120	600	400	97	586	386	95	873
SL-12x60-SI	120	600	134	575	95	513	513	SL-12x60x40R R - in / L - out	120	400	600	97	386	586	95	873
SL-12x80-SI	120	800	134	775	95	693	693	SL-12x80-45L L - in / R - out	120	800	450	97	786	436	95	1098
SL-12x100-SI	120	1000	134	975	95	873	873	SL-12x80x45R R - in / L - out	120	450	800	97	436	786	95	1098

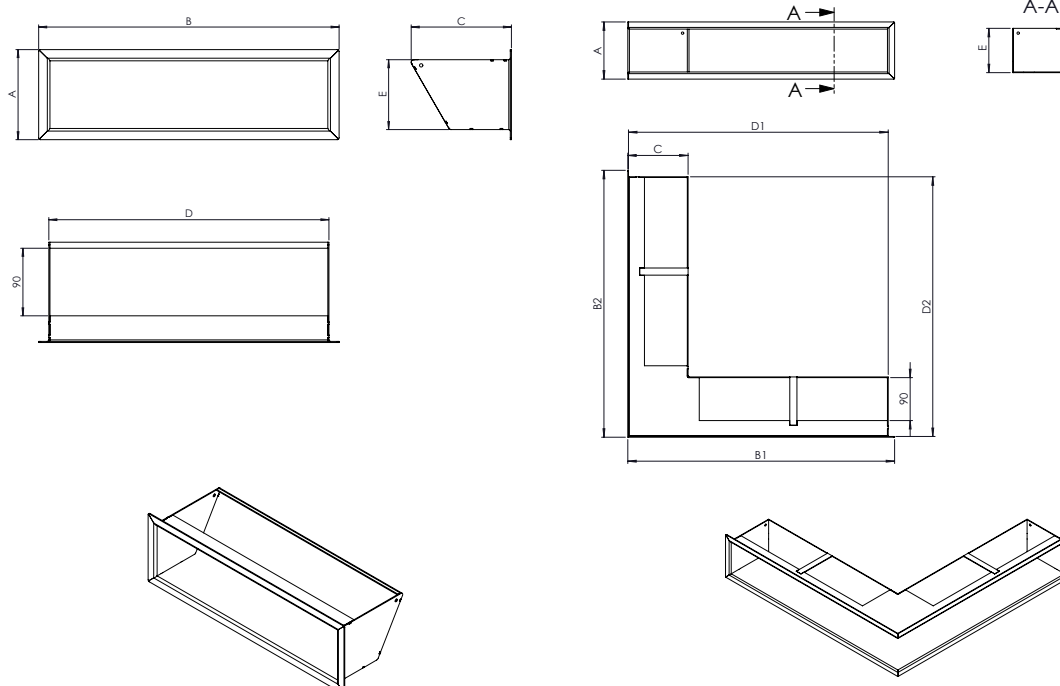

PRODUCT INFORMATION

- Luft type vent, mounted in the fireplace housing.
- Made of 1,5mm thick steel.
- Available in black, with stainless steel grinded finish.
- Supply function at assembly under the fireplace insert (ventilation openings are placed up).
- Exhaust function at assembly over the fireplace insert (ventilation openings are placed down).

VENT **SLIM INOX 12**

Product code	External dimensions					Mounting holes dimensions		Active area of grids	Product code	External dimensions					Mounting holes dimensions		Active area of grids
	A	B	C	D	E	A	B1			B2	C	D1	D2	E			
SL-12x20-SI	120	200	134	175	95	153			SL-12x56x56	120	560	560	97	546	546	95	981
SL-12x40-SI	120	400	134	375	95	333			SL-12x60x40L L - in / R - out	120	600	400	97	586	386	95	873
SL-12x60-SI	120	600	134	575	95	513			SL-12x60x40R R - in / L - out	120	400	600	97	386	586	95	873
SL-12x80-SI	120	800	134	775	95	693			SL-12x80-45L L - in / R - out	120	800	450	97	786	436	95	1098
SL-12x100-SI	120	1000	134	975	95	873			SL-12x80x45R R - in / L - out	120	450	800	97	436	786	95	1098

