


CIEPŁO Z NATURY

PODSTAWOWE INFORMACJE O PRODUKCIE

- Kratka typu luft montowana w obudowie kominka.
- Wykonane ze stali 1,5mm.
- Dostępne w kolorach RAL, półpłotysk: czarny 9005, biały 9016, krem 9001, grafit 7024 (lakierowane proszkowo).
- Funkcja nawiewna przy montażu pod wkładem (otwory wentylacyjne skierowane ku górze).
- Funkcja wywiewna przy umieszczeniu nad kominkiem (otwory wentylacyjne skierowane ku dołowi).

KRATKA WENTYLACYJNA **SLIM 12**

Kod produktu	Wymiary zewnętrzne					Pole czynne kratki	Kod produktu	Wymiary zewnętrzne					Wymiary otworów montażowych			Pole czynne kratki
	A	B	C	D	E			A	B1	B2	C	D1	D2	E		
SL-12x20-SI	120	200	134	175	95	153	SL-12x56x56	120	560	560	97	546	546	95	981	
SL-12x40-SI	120	400	134	375	95	333	SL-12x60x40L L - in / R - out	120	600	400	97	586	386	95	873	
SL-12x60-SI	120	600	134	575	95	513	SL-12x60x40R R - in / L - out	120	400	600	97	386	586	95	873	
SL-12x80-SI	120	800	134	775	95	693	SL-12x80-45L L - in / R - out	120	800	450	97	786	436	95	1098	
SL-12x100-SI	120	1000	134	975	95	873	SL-12x80x45R R - in / L - out	120	450	800	97	436	786	95	1098	

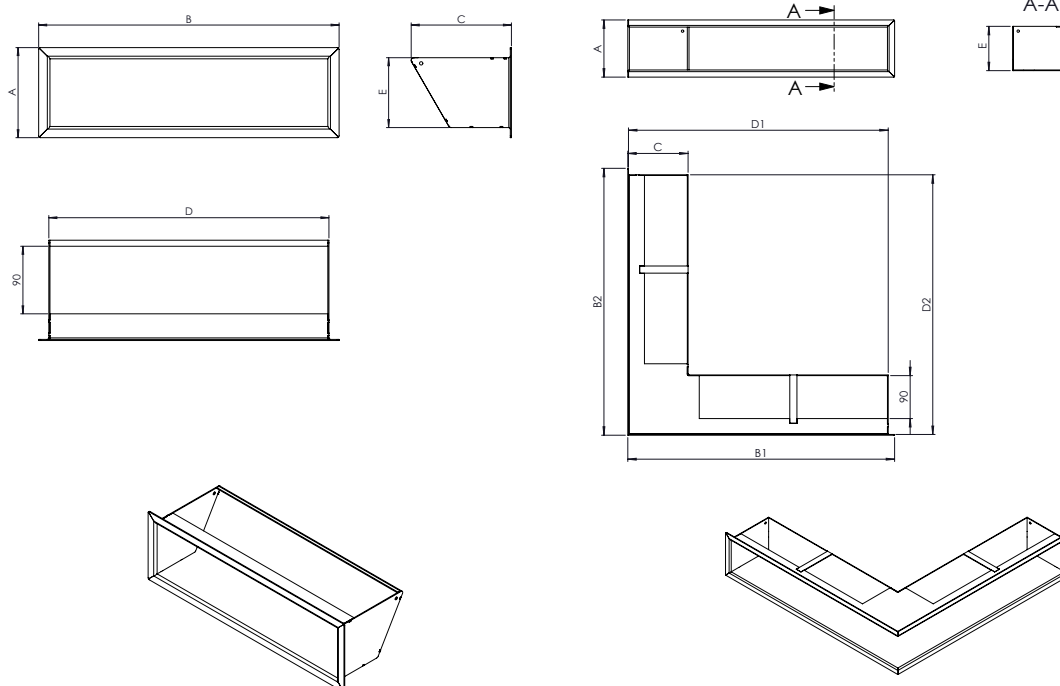

PRODUCT INFORMATION

- Luft type vent, mounted in the fireplace housing.
- Made of 1,5mm thick steel.
- Available in RAL colours, semi-gloss: black 9005, white 9016, creme 9001, graphite 7024 (powder painting).
- Supply function at assembly under the fireplace insert (ventilation openings are placed up).
- Exhaust function at assembly over the fireplace insert (ventilation openings are placed down).

VENT SLIM 12

Product code	External dimensions					Mounting holes dimensions		Active area of grids	Product code	External dimensions					Mounting holes dimensions		Active area of grids
	A	B	C	D	E	A	D			A	B1	B2	C	D1	D2	E	
SL-12x20-SI	120	200	134	175	95	153		153	SL-12x56x56	120	560	560	97	546	546	95	981
SL-12x40-SI	120	400	134	375	95	333		333	SL-12x60x40L L - in / R - out	120	600	400	97	586	386	95	873
SL-12x60-SI	120	600	134	575	95	513		513	SL-12x60x40R R - in / L - out	120	400	600	97	386	586	95	873
SL-12x80-SI	120	800	134	775	95	693		693	SL-12x80-45L L - in / R - out	120	800	450	97	786	436	95	1098
SL-12x100-SI	120	1000	134	975	95	873		873	SL-12x80x45R R - in / L - out	120	450	800	97	436	786	95	1098

